# UC2D75PO

## 75 cm, TRIMODE, 2D Model

## BUILT-IN

### UNDERCOUNTER® SERIES





## FEATURES

- Made in Italy: Designed and built entirely in Italy with artisanal precision
- Stainless Steel AISI 304 structure: High-quality material, corrosionresistant, ideal for professional and premium domestic use
- Antibacterial Interior: Hygienic surfaces that preserve freshness, safety, and food quality
- OptiView™: Diffuse, uniform LED lighting.
- Active Safety: Visual and acoustic alerts
- 100% Total No Frost: Automatic system that prevents ice formation and ensures impeccable humidity control
- Variable Speed Compressors: Precise temperature control, reduced vibrations, and maximum efficiency
- Easy Installation: Adjustable feet and rear wheels
- Fridge (2°C – 8°C): Ideal temperature for daily fresh food storage
- Fresco (-2°C – +2°C): Dedicated environment for meat, fish, and delicate ingredients, maintaining structure and quality
- Freezer (-18°C – +22°C): Maximum flexibility: freezing, long-term storage, or use as a temperature-controlled compartment up to +22°C
- Fully Integrated / Built in: Designed to integrate seamlessly into your décor, with a clean and minimal aesthetic
- Indoor & Outdoor Installation: Designed to perform flawlessly in both indoor spaces and covered outdoor areas, ensuring consistent performance even in variable climatic conditions
- Full-Extension Drawers: Equipped with soft-closing slides for smooth, silent operation and full access to the interior space
- Stainless Steel AISI 304 Interior: Elegant, hygienic, and durable, built to last

## GENERAL PROPERTIES

| | |
|---|---|
| Reversible door | NO |
| Equilance Hinge | NO |
| Soft-Closing Glides | YES |
| Low Vibration | YES |
| OptiView (Led Light Spots) | YES |
| Shelves | |
| Type Of Shelves | N/A |
| Fridge Interior Drawers | |
| Freezer Drawers | 2 |
| Full Extension Shelves 90° Door Opening | NO |
| Full Extension Drawers 90° Door Opening | NO |
| Defrost Process | AUTOMATIC |
| Ice Maker With Water Filter | NO |
| Door Open Alarms | YES |
| Shopping Fridge | NO |
| Shopping Freezer | YES |
| Power Failure Alert | YES |
| Humidity control | NO |
| Active carbon filter | NO |
| Air filter control | NO |


# UC2D75PO


## 75 cm, TRIMODE, 2D Model

## BUILT-IN

UNDERCOUNTER® SERIES

## PRODUCT DETAIL






2BD | 1M

**BD** = drawer
**M** = separate microclimates

| CAPACITY | |
|---|---|
| Volume Compartment 1 (L) | 141 |
| Volume Compartment 2 (L) | N/A |
| Volume Compartment 3 (L) | N/A |
| Total Net Volume (L) | 141 |
| Total Gross Volume (L) | 143 |
| Compartment 1 / Upper wine cellar capacity (bottles) | N/A |
| Compartment 2 / Lower wine cellar capacity (bottles) | N/A |
| Undercounter glass shelf capacity (cans) | N/A |
| Undercounter drawer capacity (cans) | N/A |
| Undercounter bottom wooden bottle holder (bottles) | N/A |

| TECHNICAL DETAILS | |
|---|---|
| Total absorbed current (A) | 2 |
| Voltage (V) | 220-240V |
| Frequency (Hz) | 50/60 Hz |
| Power Cord Length (mm) | 2 |
| Plug Type | Tipo F (Schuko) 16A IEC13 10A |
| Climatic class | SN/T |
| Noise level (dB) | 41 |
| Refrigerant (gas) | R600a |
| Water connection / female attachment | N/A |

| EFFICIENCY | |
|---|---|
| New Energy Label class | F |
| Energy consumption (kWh/year) | 262 |

| DIMENSIONS & WEIGHT | |
|---|---|
| Height of the product (closed weels) (mm) | 865 |
| Adjustable feet height (mm) | 25 |
| Width of the product (mm) | 748 |
| Depth of Product without handle (mm) | 576 |
| Wall cavity height (mm) | 870 |
| Wall cavity width (mm) | 750 |
| Wall cavity depth (mm) | 600 |
| Net Weight (kg) | 79 |
| Gross Weight (kg) | 94 |

| TEMPERATURE RANGES | |
|---|---|
| Climatic compartments | 1 |
| Compartment 1 / Upper temperature (°C) | from N/A to N/A |
| Compartment 2 / Middle temperature (°C) | from N/A to N/A |
| Low temp zone | NO |
| Compartment 3 / Low temperature (°C) | from 8 to -22 |
| Dual zone | NO |

### ACCESSORIES

- Cleaning kit
- Painting


# UC2D75PO

## 75 cm, TRIMODE, 2D Model


## BUILT-IN


UNDERCOUNTER® SERIES

## PRODUCT SPECIFICATIONS AND DIMENSIONS

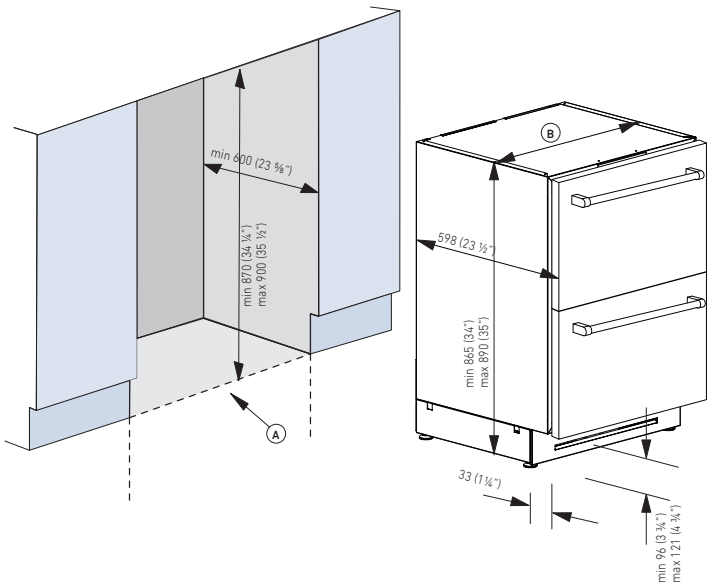


| TECHNICAL DATA | |
|---|---|
| Niche Width A (mm) | 750 |
| Unit Width B (mm) | 748 |
| Unit Width with lateral frames C (mm) | 748 |

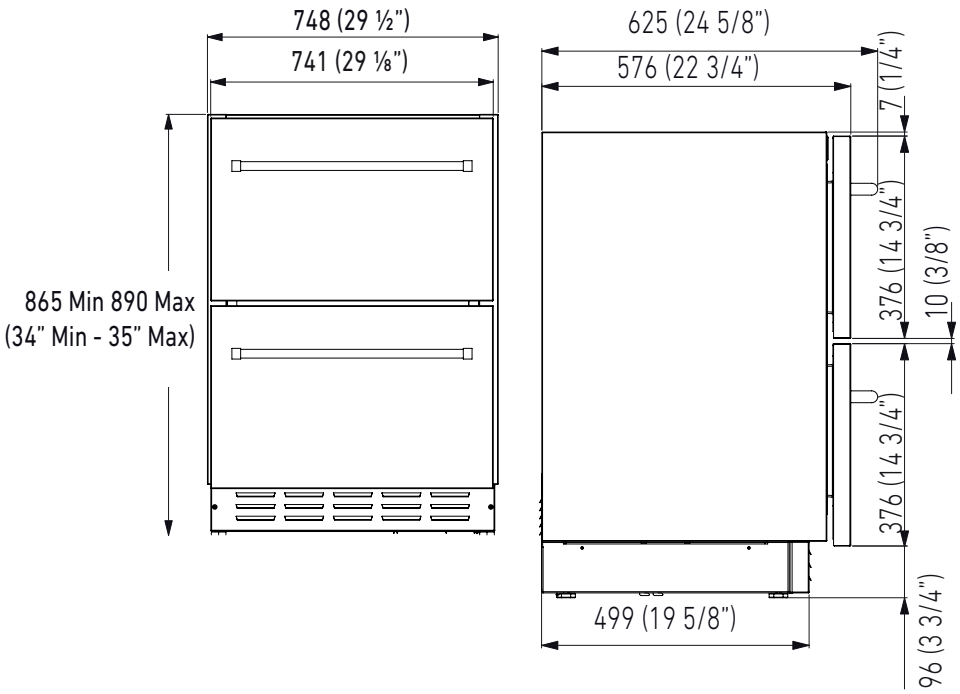

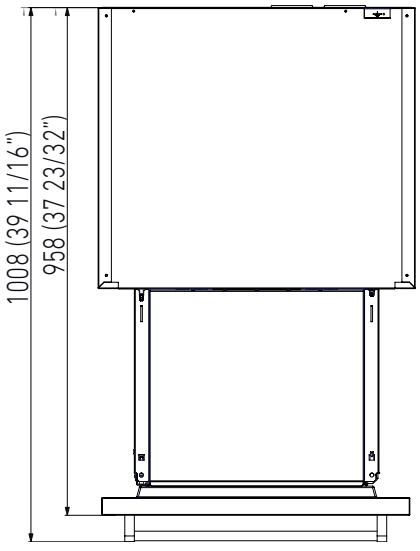
For installation specifications, please consult with Fhiaba.

For optimum installation, we recommend using the

Based on the adjustment of the feet and the height of the panel from the floor, the customer defines the perforated plinth to be installed on the equipment.

# UC2D75PO


## 75 cm, TRIMODE, 2D Model

## BUILT-IN


### UNDERCOUNTER® SERIES

## PRODUCT SPECIFICATIONS AND DIMENSIONS

### Electrical Connection

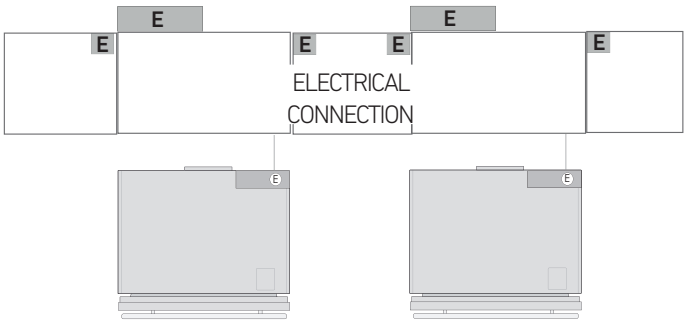


Electrical and water connections (if applicable) should be reachable without having to uninstall the appliance. If the connections must be made directly behind the appliance then it is recommended to recess those connections.
IMPORTANT: do not put the water shut-off valve behind the appliance where it will be inaccessible.

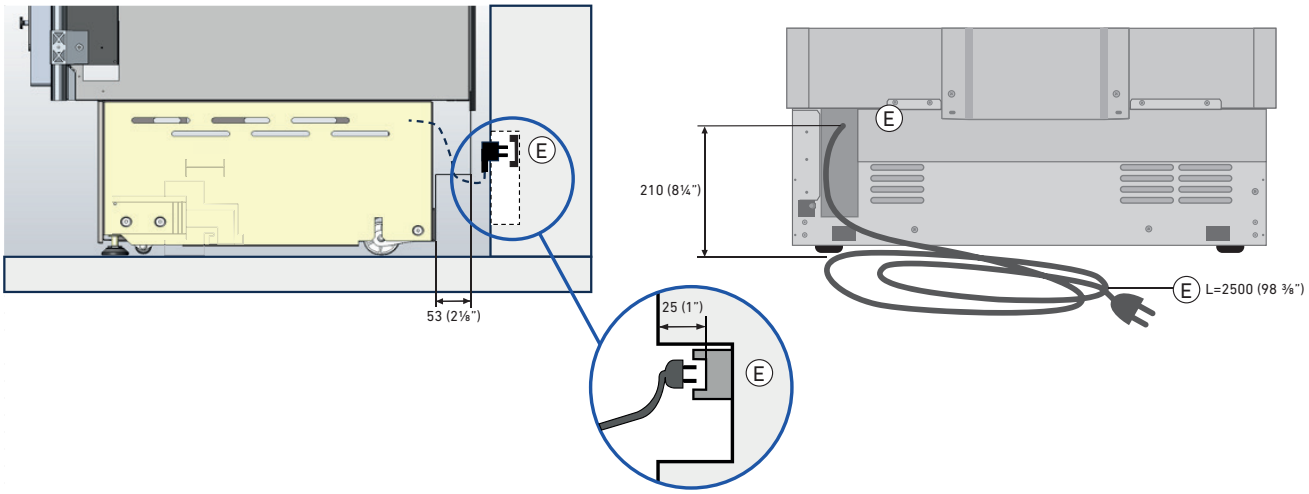


For installation specifications, please consult with Fhiaba.
For optimum installation, we recommend using the actual product as the best guide.